

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

SZ9-97-009N

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/463002

INTERNATIONAL APPLICATION NO
PCT/IB97/00893INTERNATIONAL FILING DATE
17 July 1997PRIORITY DATE CLAIMED
17 July 1997TITLE OF INVENTION Method and Apparatus For Multipoint-To-Point
Transmission in An ATM Network

APPLICANT(S) FOR DO/EO/US

P. Droz, I. Illiadis, G. Goren

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

- 1 ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
- 2 ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
- 3 ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
- 4 ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
- 5 ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
- a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
- b. ☐ has been transmitted by the International Bureau.
- c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- 6 ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
- 7 ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
- a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
- b. ☐ have been transmitted by the International Bureau.
- c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
- d. ☐ have not been made and will not be made.
- 8 ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- 9 ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
- 10 ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

- 11 ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
- 12 ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
- 13 ☐ A **FIRST** preliminary amendment.
- ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
- 14 ☐ A substitute specification.
- 15 ☐ A change of power of attorney and/or address letter.
- 16 ☒ Other items or information:

- Copy of annexes to the International Preliminary
Examination Report

Form PTO-1390 (REV 11-98) page 2 of 2

9/ppts.

Method and Apparatus for Multipoint-to-Point
Transmission in an ATM Network

Description:

The invention relates to a method and an apparatus for sending frames of data from at least two sending nodes via one or more forwarding nodes to one receiving node in an ATM network wherein each frame of data is partitioned into cells.

ATM (asynchronous transfer mode) networks are well known and wide-spread over the world. In an ATM network, the data to be transferred is put together in a frame which consists of a number of cells. The number of the cells depends on the amount of data to be transferred. Each of the cells includes 48 bytes data information and 5 bytes control information. The control information carries all necessary information for transferring the cell from its source to a desired destination. The control information includes a VPI (virtual path identifier) field and a VCI (virtual channel identifier) field.

The cells are sent from the sending or source node via a number of nodes to the receiving or destination node. Usually, the VPI field identifies the desired path of the data. This is accomplished by labels which are written into the VPI field and which are swapped by each node. The swapping is based on swapping tables which are created by a resource manager during the establishment of a new path or during the introduction of a new node and which are present in each node. Such a swapping table includes the label of the incoming VPI field, a new label for the outgoing VPI field and the respective input and output port.

When a cell arrives at an input port of a node, the label of the VPI field of the incoming cell is read and searched for in

the swapping table of the node. Then, the corresponding label for the VPI field of the outgoing cell is read from the swapping table and is written into the VPI field of the outgoing cell. And then, the cell is sent to the respective output port of the node which is mentioned in the swapping table.

The connection between a source and a destination is called a point-to-point connection. There is only one path without any spreading or merging of other paths. As mentioned, any such point-to-point connection is carried out by swapping the label of the VPI field in each node.

Another possibility is a point-to-multipoint connection. In this case, one source broadcasts the same data to a number of destinations. For that purpose, the ATM network provides a SETUP message and an ADD PARTY message. With the SETUP message, a point-to-point connection is established. Then, with the ADD PARTY message, it is possible to add further destinations to this point-to-point connection and to thereby build up the point-to-multipoint connection. As there is only one single source, no problem arises in the destinations to combine the frame originally sent from this single source out of the received cells.

It is also possible to reverse the point-to-multipoint connection into a multipoint-to-point connection. For this purpose, a reverse flag may be included in the SETUP message and in the ADD PARTY message.

Such a multipoint-to-point connection includes at least two sending nodes which are followed by forwarding nodes and only one receiving node. Thereby, the data to be transferred is merged together from the number of sources to the single destination. This has the consequence that cells from different sources may be interleaved when they are merged together. The cells arriving at the single destination are

therefore mixed with respect to their different sources and have to be reassembled appropriately. Therefore, a mechanism is needed to reassemble the cells from the different sources correctly in the single destination.

A first mechanism is that each forwarding node collects all cells that arrive on a specific input port until the node has collected all cells of one and the same frame. Then, these collected cells are forwarded to the next downstream node continuously, i.e. no other cells from other sources are interleaved. Using this mechanism, the cells are not mixed and it is possible to reassemble the frames sent by the different sources as these frames arrive continuously at the single destination. However, this mechanism has the disadvantage that it introduces a significant delay in the transfer of the data. As well, this mechanism requires additional memory in the forwarding nodes.

In another mechanism, the VCI field of a cell is used to identify the particular source of the cell. Each source is assigned with a globally unique value which is then included by the source in the VCI field of each cell to be sent by the source. Due to the unique configuration, all cells arriving at a destination and having an identical value may then be reassembled into the same frame. This mechanism does not introduce a delay but it requires a globally unique assignment of values for the VCI field which is practically very difficult to guarantee.

It is therefore an object of the invention to provide a method and an apparatus for a multipoint-to-point connection to reassemble the cells from the different sources effectively in the single destination.

In a method as described above, the invention solves this object by the steps of: the sending nodes include a first label into each of the cells representing an identification of

the routing of the cell, the sending nodes include a second label into each of the cells representing an identification of the source of the cell, the forwarding node swaps the first and the second label according to a swapping table.

The first label is responsive for the routing of the cell, i.e. the cell finds its path to the desired destination with the help of the first label. Additionally, the second label carries the identification of the source from which the cell comes from. Both cells are swapped in each node with the result that, at the destination, the cell still includes these two labels. The first label has done its duty as the cell has arrived at the desired destination. However, the second label still carries the identification of the source of the cell so that the destination is now able to check from where the cell is coming.

If, in a multipoint-to-point connection, a number of cells of different frames from different sources interleave in merging nodes inbetween the sources and the single destination, the destination is able to differentiate the cells with respect to their different sources with the help of the second label. Therefore, the destination is able to reassemble the cells of the different frames correctly.

The described method according to the invention does not need any additional memory in the forwarding nodes. As well, there is no delay in the forwarding nodes. And it is also not necessary to create globally unique identifications for the nodes. It is sufficient to include the second label in the cells and to swap this second label in the forwarding nodes. Then, the destination is able to differentiate the cells of the different sources with the help of this second label.

In an advantageous embodiment of the invention, the forwarding node swaps the first and the second label according to the same swapping table. As a result, it is not necessary to

create an additional swapping table for the second label. Instead, the first and the second label use the same swapping table which has to be created for the first label.

In another advantageous embodiment of the invention, the forwarding node swaps the first label in a forward direction and the second label in a backward direction. By swapping the second label in a backward direction, a simulation is executed in which a simulated cell is transferred from the actual destination to the actual source. If the actual cell arrives at the actual destination, the simulated cell arrives at the source. As a consequence, the second label of the actual cell carries the identification of the source when the actual cell arrives at the destination. As already described, the destination is then able to check from where the cell is coming from with the help of the second label.

In another advantageous embodiment of the invention, with respect of the second label, the forwarding node enters the swapping table in the column of the output labels and reads the corresponding input label. Usually, the swapping table is entered in a forward direction, i.e. it is entered in the column of the input labels and the corresponding output label is read out. This is valid for the first label. However, as already described, the second label is swapped in a backward direction. This means that the swapping table is entered in the column of the output labels and the corresponding input label is read out. By using this backward swapping in connection with the second label, the above described simulation is carried out. Due to the backward swapping, the simulated cell is transferred from the actual destination to the actual source with the result that the second label carries the identification of the source when the actual cell arrives at the destination.

In another advantageous embodiment of the invention, the swapping of the second label is carried out for the same ports

of the respective forwarding node as for the first label. In particular in a multipoint-to-point connection, it is possible that the swapping table includes several identical labels in the column of the output labels. In order to enter the correct label of the column of the output labels, the used ports of the respective node are checked. These ports may also be included in the swapping table or may be stored in any other manner. It is then checked which ports of the respective node belong to the first label, i.e. on which port the cell came in and on which port the cell will leave the node. Then, the column of the output labels is checked for that output label which belongs to the same port connection. Finally, this output label is entered and the corresponding input label is read out of the swapping table in the described backward direction.

In another advantageous embodiment of the invention, the first label is written in and read from the VPI field of the respective cell and the second label is written in and read from the VCI field of the respective cell. In other words, the VPI field is used as usual for the first label and the VCI field is used to carry the second label. As a result, no additional fields or the like are necessary to carry the second label.

Further advantages of the invention become apparent from the following description of an embodiment of the invention which is shown in the figures of the drawing.

Figures

1a to 1h show schematic diagrams of an ATM network with ten nodes, and
figure 2 shows a schematic diagram of another ATM network.

Figure 1a shows an ATM network with three nodes A, B, C which are connected via seven further nodes 1, 2, 3, 4, 5, 6, 7. Nodes A, B, C act as sources/destinations, respectively, by

being a sender of data or by being a receiver of data. Nodes 1, 2, 3, 4, 5, 6, 7 act as forwarding nodes.

The nodes 1, 2, 4, 5, 6, 7 of figure 1a have only two ports, respectively. Therefore, for the purpose of simplicity, the ports are not identified. It is assumed that the nodes 1, 2, 4, 5, 6, 7 forward the received data to the respective next node in each direction. Of course, it is possible that the nodes 1, 2, 4, 5, 6, 7 have more than two ports which then would have to be identified and managed as described in connection with node 3.

Node 3 is a merging point and has three ports a, b, c.

The data transferred on the ATM network of figure 1a is partitioned into frames, i.e. all data to be transferred from a source to a destination is included in one frame. The protocol for these transfers is e.g. the Internet Protocol IP.

Each frame consists of a number of cells. The data to be transferred is partitioned into these cells. Each cell carries 48 bytes data information and 5 bytes control information. The control information includes a virtual path identifier VPI field which identifies in particular the destination to which the data has to be transferred. Furthermore, the control information includes a virtual channel identifier VCI field.

In figure 1b, the nodes A, B, C of the ATM network of figure 1a are assigned with starting labels. For example, if a cell has to be transferred from node A to node C, the starting label would have to be "3". Or if a cell has to be transferred from node B to node C, the starting label would have to be "13". The starting label to the node itself, i.e. the starting label "23" in node C identifies the node C as such.

In figure 1c, swapping tables are included for each of the nodes 1, 2, 3, 4, 5, 6, 7. As the nodes 1, 2, 4, 5, 6, 7 have

only two ports, respectively, no port information is included in the swapping tables of these nodes 1, 2, 4, 5, 6, 7. These swapping tables, therefore, include in the left column an input label and in the right column a corresponding output label.

As the node 3 has the three ports a, b, c, the swapping table of port 3 includes additional port information. In the left column, the input port and an input label are included and in the right column a corresponding output port and a corresponding output label are included.

These swapping tables are created during the establishment of the ATM network. The swapping tables may be changed when a new node or when a new connection is added. The labels of the swapping tables define the path of a cell from its source to its destination.

The labels are included in the VPI field of a cell. When the cell is transferred from one node to the next node, the output label of the one node is sent to the next node and is received there as the input label. Then, the label is swapped and sent to the next node, etc..

Figure 1c shows the changes of the labels when a cell is sent from node A to node B. The starting label in node A to node B is "2". In node 1, the input label "2" is swapped to the output label "4". In node 2, the input label "4" is swapped to the output label "5". In node 3, the input port "a" and the input label "5" is swapped to the output label "5" and the output port "b". Then, in node 4, the input label "5" is swapped to the output label "4" and in node 5 to the output label "3". This output label "3" identifies the node B.

Figure 1d shows the changes of the labels when a cell is sent from node A to node C. Figure 1e shows the changes of the labels when a cell is sent from node B to node A. Figure 1f

shows the changes of the labels when a cell is sent from node B to node C. Figure 1g shows the changes of the labels when a cell is sent from node C to node A. Figure 1h shows the changes of the labels when a cell is sent from node C to node B.

It is assumed that a multipoint-to-point connection from node A and node B to node C is established in the ATM network of figure 1h.

With respect to a first cell of a first frame of data starting from node A and running to node C, the labels of this first cell are swapped as follows:

A -> C: 3 -> node 1 -> 7 -> node 2 -> 9 -> node 3 -> 15
 -> node 6 -> 21 -> node 7 -> 23.

With respect to a second cell of a second frame of data starting from node B and running to node C, the labels of this second cell are swapped as follows:

B -> C: 13 -> node 5 -> 33 -> node 4 -> 19 -> node 3 -> 15
 -> node 6 -> 21 -> node 7 -> 23.

As a consequence, all incoming cells in node C have the label "23". Therefore, it is not possible to differentiate whether the received cells belong to the first or the second frame, i.e. from which source the cells come from. If the cells of the first and the second frame from node A and node B are interleaved in the merging node 3, then it is not possible to reassemble the correct first and second frame in the receiving node C.

According to the invention, a second label is included additionally in the cell to be transferred. This label identifies the source of the respective cell. The label is included in the VCI field of the cell.

In the above example of a multipoint-to-point connection from node A and node B to node C, the first label is included in the VPI field as described. Furthermore, the identification of the sending node is included as the second label. This second label is then swapped according to the swapping tables in the nodes, however, in a backward direction. This means that the respective swapping table is entered in the column of the output label and the corresponding input label is read out.

With respect to a first cell of a first frame of data starting from node A and running to node C, the labels of this first cell are swapped as follows:

A -> C: 3/20 -> node 1 -> 7/30 -> node 2 -> 9/40 -> ... ,
 wherein the first figure relates to the first label
 and the second figure relates to the second label.

For example, the swapping table of node 2 is entered with the first label in the VPI field in a usual forward direction so that the first label changes from "7" to "5". In the same node 2, the swapping table is entered with respect to the second label of the VCI field in a backward direction, i.e. from the output label to the input label. This results in a change of the second label from "30" to "40".

In node 3, the swapping table includes e.g. two output labels "5" in the backward direction with respect to the second label so that it would not be clear which input label is correct. In this case, the information about the input port and the output port has to be used. In particular, that output label has to be used which relates to the same input/output port connection as the first label.

In the above example, the first label "9" would be swapped according to the swapping table of node 3 to the label "15". Furthermore, the swapping table of node 3 includes the information that the input port a and the output port c belong

to this swapping of the first label. The second label "40" exists twice as an output label in the swapping table of node 3. However, only one of these two output labels belongs to the input/output port connection from port a to port c. This output label is selected and, in a backward direction, the corresponding input label is read which is "10".

As a result, the labels of the above mentioned first cell starting from node A and running to node C are swapped as follows:

A -> C: 3/20 -> node 1 -> 7/30 -> node 2 -> 9/40
 -> node 3 -> 15/10 -> node 6 -> 21/11
 -> node 7 -> 23/12.

With respect to a second cell of a second frame of data starting from node B and running to node C, the labels of this second cell are swapped as follows:

B -> C: 13/3 -> node 5 -> 33/4 -> node 4 -> 19/5
 -> node 3 -> 15/6 -> node 6 -> 21/7
 -> node 7 -> 23/8.

The cells arriving at node C therefore include either the labels 23/12 or the labels 23/8. The first label "23" is equal for both cells. However, the second label is different. The cells coming from node A carry the second label "12" whereas the cells coming from node B carry the second label "8". The label "12" is the starting label to node A from node C and the label "8" is the starting label to node B from node C.

As a consequence, the node C is able to differentiate the arriving cells with respect to different sources. The cells with the second label "12" belong to the node A and the cells with the second label "8" belong to node B. Interleaved cells may therefore be reassembled correctly with the help of the second label.

The above method is described in connection with a symmetric ATM network. However, the method also applies in the case of an asymmetric ATM network as described now.

Figure 2 shows an ATM network with five nodes A, B, C, D, E which are connected via six further nodes 1, 2, 3, 4, 5, 6. Nodes A, B, C, D, E act as sources/destinations, respectively, by being a sender of data or by being a receiver of data. Nodes 1, 2, 3, 4, 5, 6 act as forwarding nodes. Node 1 has two ports u, f, node 2 has three ports x, y, z, node 3 has four ports a, b, c, d, node 4 has one port v, node 5 has one port w and node 6 has three ports g, h, m.

In order to establish the ATM network shown in figure 2, the nodes 1, 4, 5 sent establishment messages to their neighbors. These messages include the identification of the respective nodes A, B, C, D, E and a starting label as follows:

```
node 1:  A,1      B,2
node 4:   C,10
node 5:  D,1      E,10.
```

When such an establishment message reaches one of the neighbor nodes on one of its ports, this node marks the input port and then generates its own establishment message for the respective node 1, 4, 5 and sends it out on the correct port. This output port is also stored in the node.

It is now assumed that the paths originated by node A and node B reach node 3 via node 6 and the paths destined to node A and node B are routed via node 2.

Then, node 2 forwards the following establishment messages to port y:

```
node 2:  A,10     B,11.
```

13

Node 3 sends the following establishment messages:

```

node 3:  A,10      B,21      to ports b, c, d
          C,12      to ports a, c, d
          D,13      E,14      to ports a, b, c.

```

And node 6 forwards the following establishment messages to port g and port m:

```

node 6:  C,1      E,3.

```

Now, the swapping tables of node 3, node 2 and node 6 have the following structure wherein the left column includes the input labels, the middle column includes the output labels and the right column includes the output ports:

```

node 3:  10  10  a      (-> A)
          21  11  a      (-> B)
          12  10  b      (-> C)
          13   1  d      (-> D)
          14  10  d      (-> E)

node 2:  10   1  x      (-> A)
          11   2  x      (-> B)

node 6:   1  12  h      (-> C)
          2  13  h      (-> D)
          3  14  h      (-> E).

```

At the nodes 1, 4, 5, the virtual circuits directly go to the IP layer. Therefore, the swapping tables of the nodes 1, 4, 5 have the following structure wherein a hyphen stands for a virtual circuit which starts or ends at the respective node:

```

node 1:   1   -   -      (-> A)
          2   -   -      (-> B)
          -   1   f      (-> C)

```

14

```

- 2 f      (-> D)
- 3 f      (-> E)

node 4:    - 10 v      (-> A)
           - 21 v      (-> B)
10 - -     (-> C)
           - 13 v      (-> D)
           - 14 v      (-> E)

node 5:    - 10 w      (-> A)
           - 21 w      (-> B)
           - 12 w      (-> C)
1 - -      (-> D)
10 - -     (-> E).

```

When the establishment messages initiated by the nodes A and B reach the nodes 4 and 5, reverse establishment messages are generated as follows:

```

node 4:    rC,10                      to port v
node 5:    rD,1      rE,10            to port w.

```

Then, node 3 forwards establishment messages on the same port at which the forward establishment messages arrived originally, i.e. on port a, as follows:

```

node 3:    rC,12      rD,13      rE,14.

```

Finally, node 2 forwards establishment messages on port x as follows:

```

node 2:    rC,41      rD,42      rE,43.

```

In the same manner, reverse establishment messages are created when the original establishment messages initiated by node C, node D and node E arrive at node 1 as follows:

15

node 1: rA,1 rB,2 to port f.

Then, node 6 forwards establishment messages as follows:

node 6: rA,10 rB,52 to port h.

This has the result that the swapping tables are expanded as follows:

node 3:	10	10	c	(<- A)
	21	52	c	(<- B)
	12	10	b	(<->C)
	13	1	d	(<->D)
	14	10	d	(<->E)
node 2:	41	12	y	(<- C)
	42	13	y	(<- D)
	43	14	y	(<- E)
node 6:	10	1	g	(<- A)
	52	2	g	(<- B)
node 1:	-	41	u	(<- C)
	-	42	u	(<- D)
	-	43	u	(<- E).

When a cell is sent from node A to node D, it passes through node 1, node 6, node 3 and node 5. In these nodes 1, 6, 3, 5, the first label included in the VPI field and the second label included in the VCI field of the respective cell are swapped as follows:

A -> D: node 1 -> 2/1 -> node 6 -> 13/10 -> node 3
 -> 1/10 -> node 5.

When at the same time a cell is sent from node C to node D, it passes through node 4, node 3 and node 5. In these nodes 4, 3,

5, the first label and the second label are swapped as follows:

C -> D: node 4 -> 13/10 -> node 3 -> 1/12 -> node 5.

The first label of the cells coming from node A and node C have the same label "1" when they arrive at node 5. This is the identification of the destination in node 5, i.e. node D. However, the second label of the cells is different. The second label of the cell coming from node A is "10" and the second label of the cell coming from node C is "12". In node 5, the label "10" is the identification of node A and the label "12" is the identification of node C.

Therefore, node 5 is able to differentiate the cells coming from node A and from node C and to reassemble the respective frames correctly.

According to the above examples of ATM networks shown in figures 1a to 1h and in figure 2, the second label relating to the source of the respective cell is written into and read out of the VCI field of the cell. Alternatively, it is also possible to use only a part of the VCI field, in particular one byte of the VCI field, for the second label. As well, it is possible to use two bytes of the 48 bytes of the cell which usually carry the information in order to carry the first and the second labels. This last possibility may be required for very large networks where 16 bits per label are necessary.

According to the above examples, the swapping tables are stored in the nodes. Alternatively, it is also possible to store several swapping tables in the ports of the nodes.

Revised Set of Claims (1.9.1999)

1. Multipoint-to-point transmission method for sending frames of data from at least two sending nodes via one or more forwarding nodes to one receiving node in an ATM network wherein each frame of data is partitioned into cells, comprising the steps of:

the sending nodes include a first label into each of the cells representing an identification of the routing of the cell,

the sending nodes include a second label into each of the cells representing an identification of the source of the cell,

the forwarding node swaps both the first label associated with a forward direction and the second label associated with a backward direction using a swapping table.

2. Method according to claim 1, further comprising the step of:


the forwarding node swaps the first and the second label according to the same swapping table.

3. Method according to claim 1, further comprising the step of:

with respect to the second label, the forwarding node enters the swapping table in the column of the output labels and reads the corresponding input label.

4. Method according to claim 1 or claim 3, further comprising the step of:

the swapping of the second label is carried out for the same ports of the respective forwarding node as for the first label.



5. Method according to one of claims 1 to 4, further comprising the step of:

the first label is written in and read from the VPI field of the respective cell and the second label is written in and read from the VCI field of the respective cell.

6. Apparatus for sending frames of data in a multipoint-to-point fashion from at least two sending nodes via one or more forwarding nodes to one receiving node in an ATM network wherein each frame of data is partitioned into cells, comprising:

in the sending nodes, means for including a first label into each of the cells representing an identification of the routing of the cell,

in the sending nodes, means for including a second label into each of the cells representing an identification of the source of the cell,

in the forwarding node, means for swapping both the first label associated with a forward direction and the second label associated with a backward direction using a swapping table.

7. Apparatus according to claim 6, further comprising:

in the forwarding node, means for swapping the first and the second label according to the same swapping table.

8. Apparatus according to claim 7, further comprising:

in the forwarding node, means for entering the swapping table in the column of the output labels and means for reading the corresponding input label.

Abstract:

A method is described for sending frames of data from at least two sending nodes via one or more forwarding nodes to one receiving node in an ATM network. Each frame of data is partitioned into cells and includes a VPI field and a VCI field. The sending nodes include a first label into the VPI field of each of the cells representing an identification of the routing of the cell. Furthermore, the sending nodes include a second label into the VCI field of each of the cells representing an identification of the source of the cell. The forwarding node swaps the first and the second label according to a swapping table. With respect to the second label, the forwarding node enters the swapping table in the column of the output labels and reads the corresponding input label.

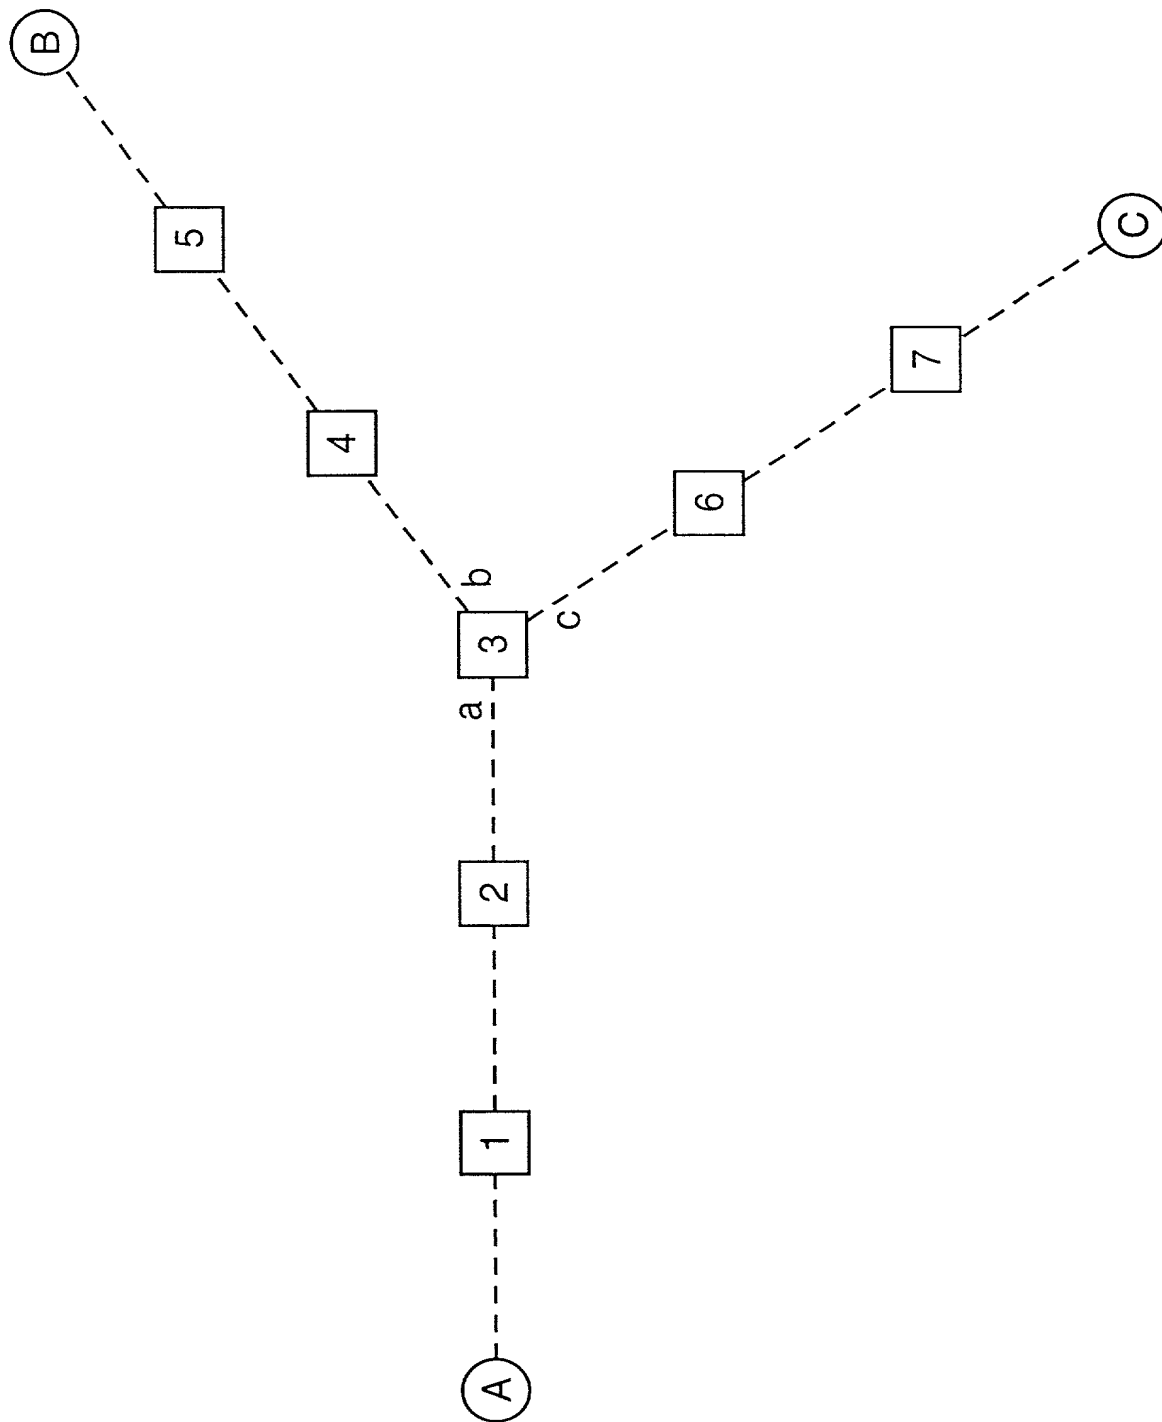


Fig. 1a

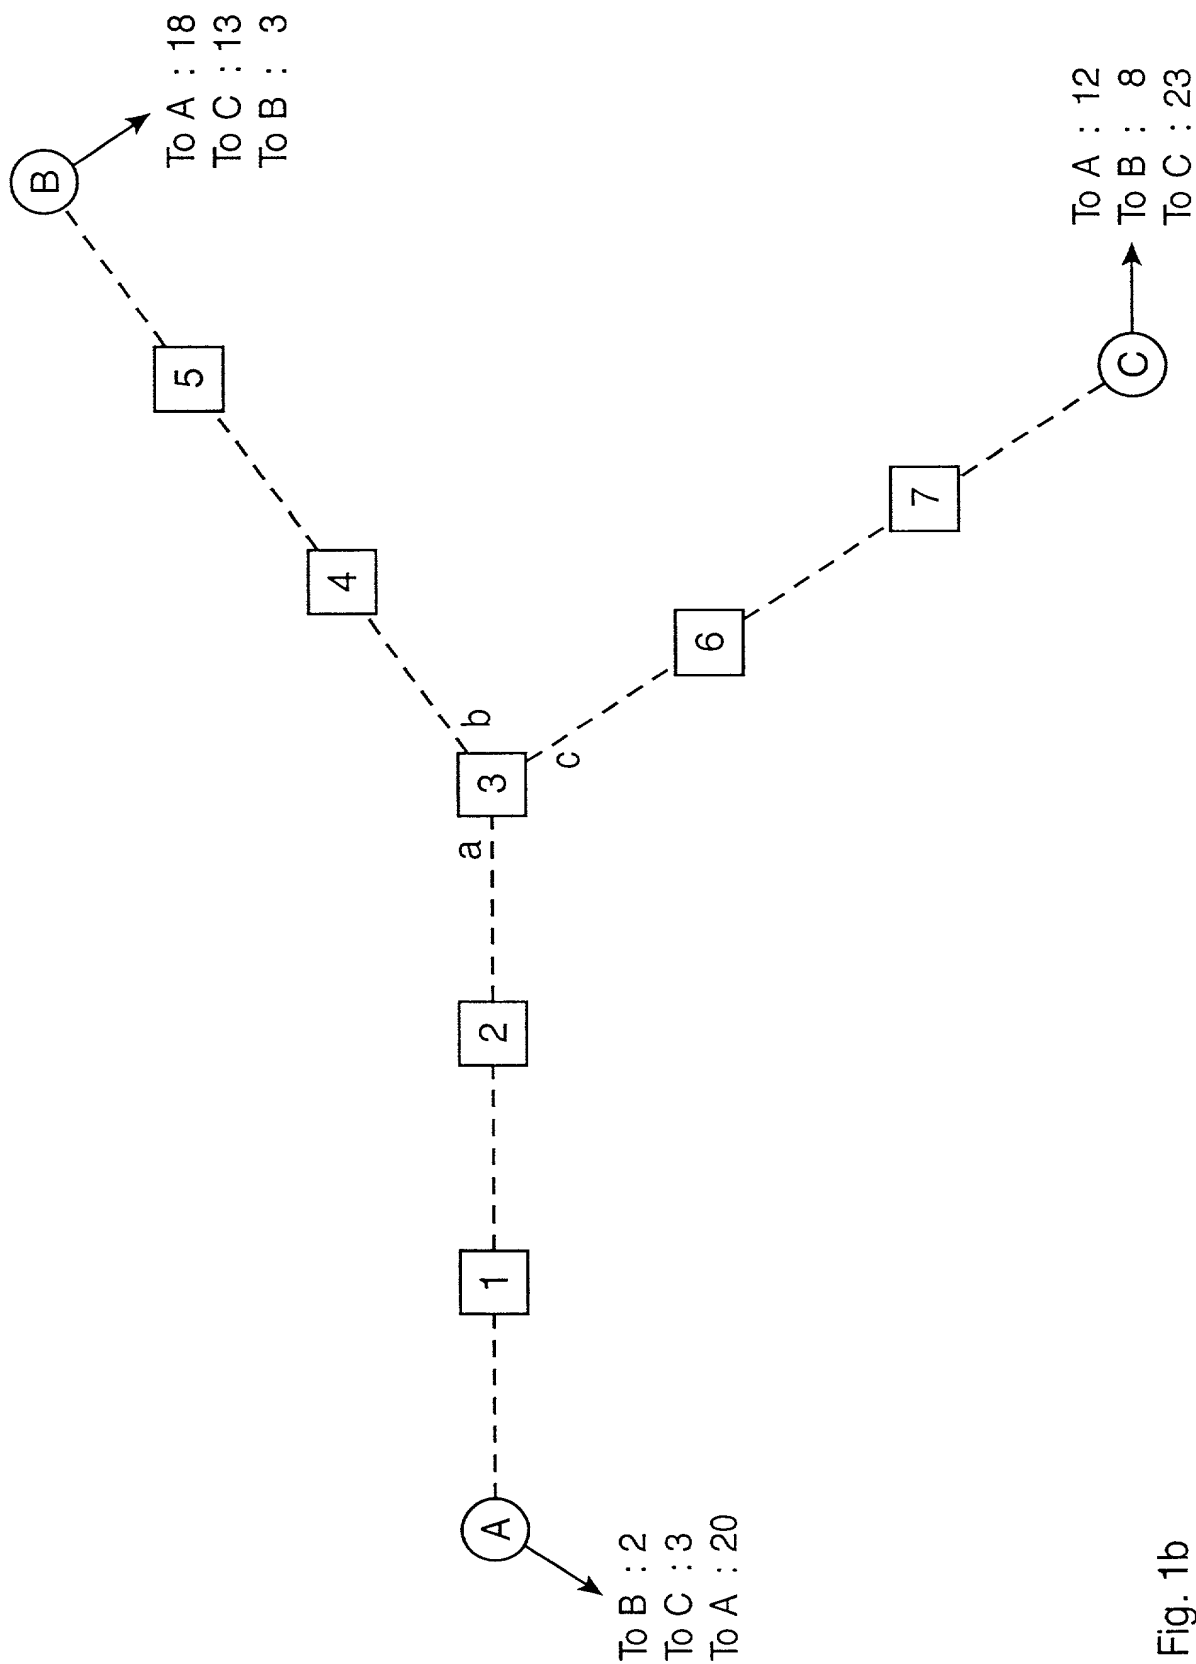


Fig. 1b

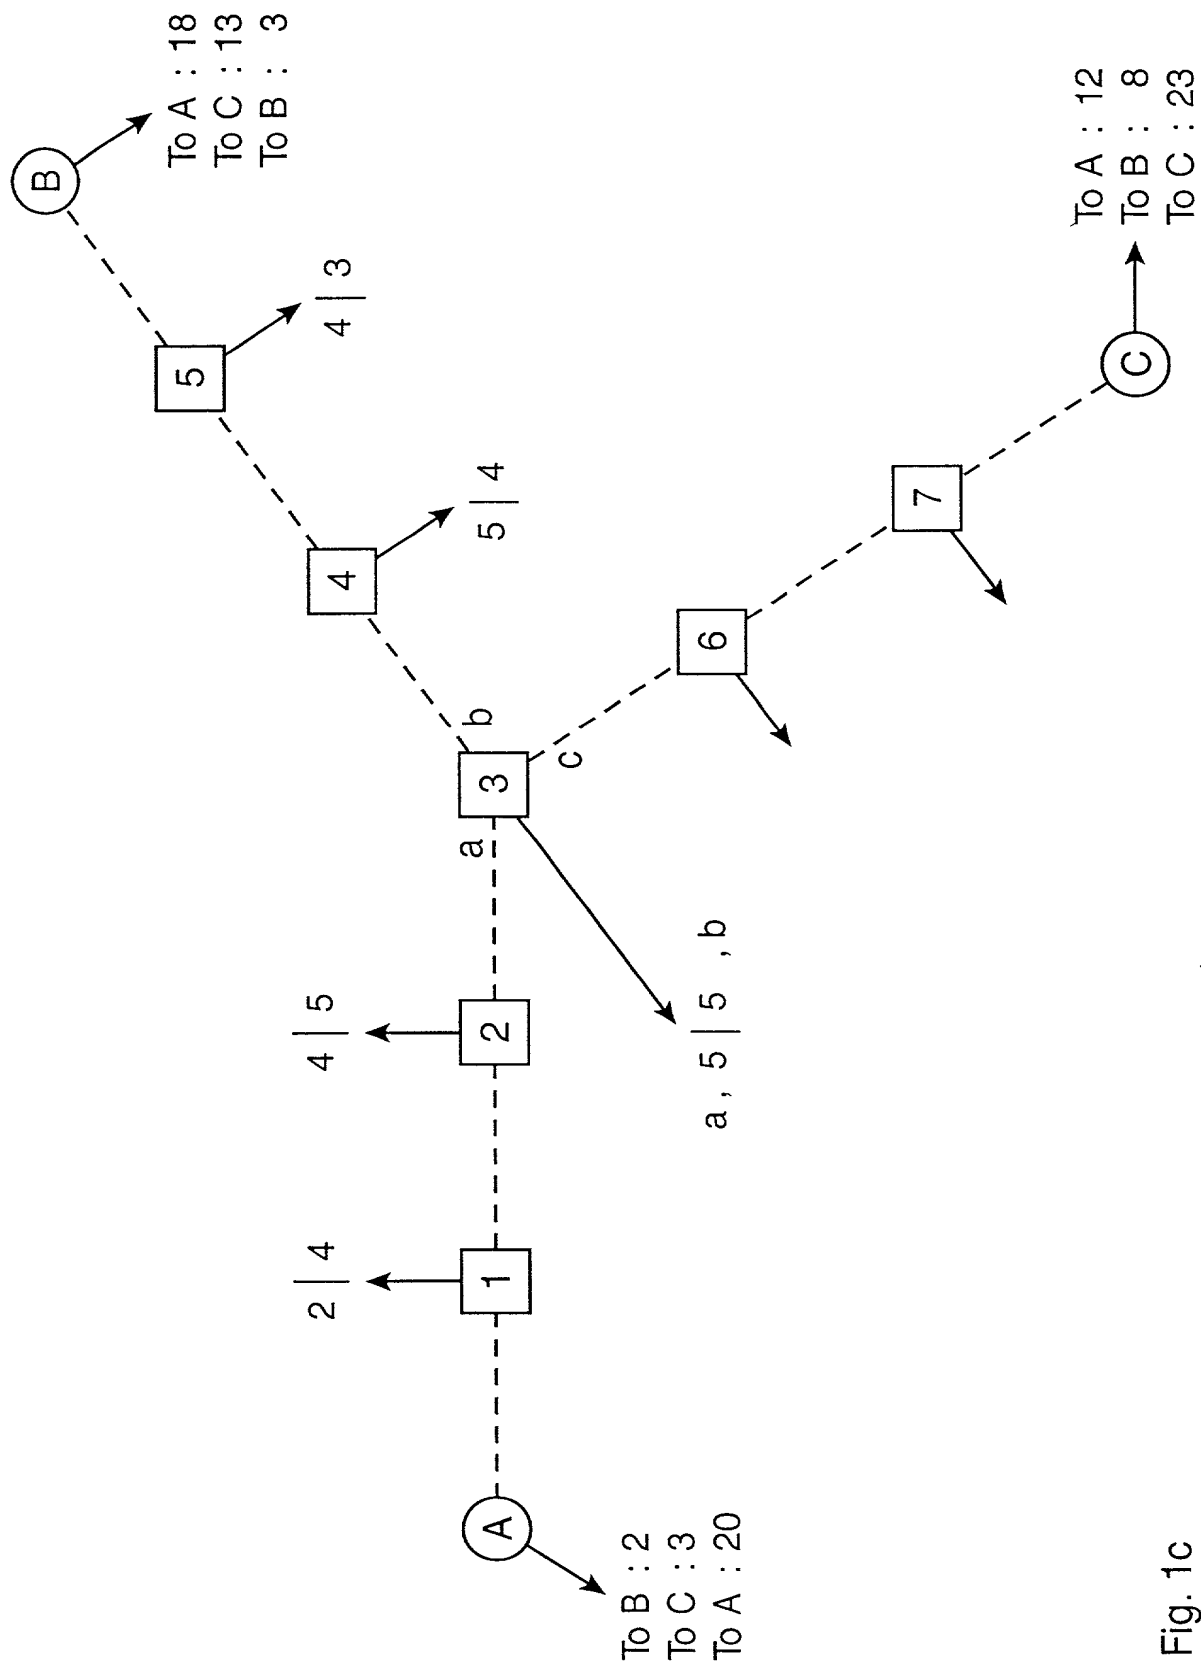


Fig. 1c

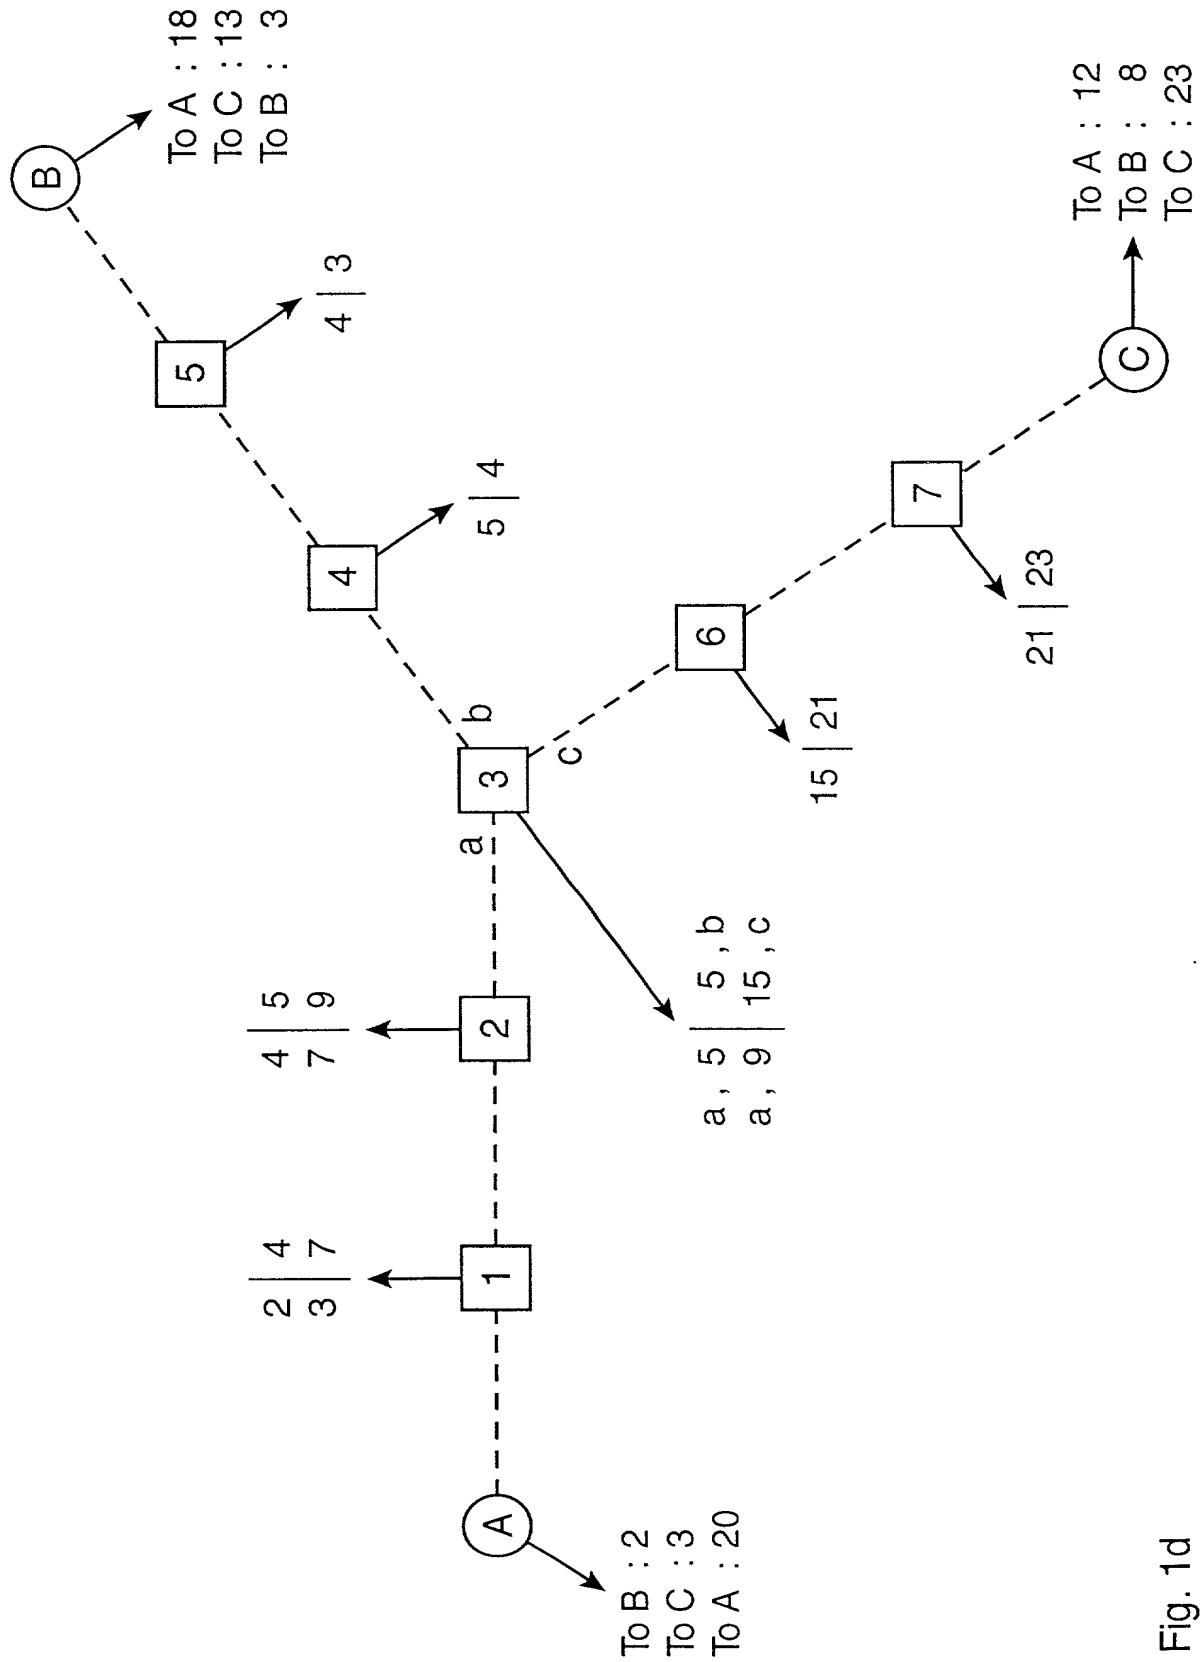


Fig. 1d

5/9

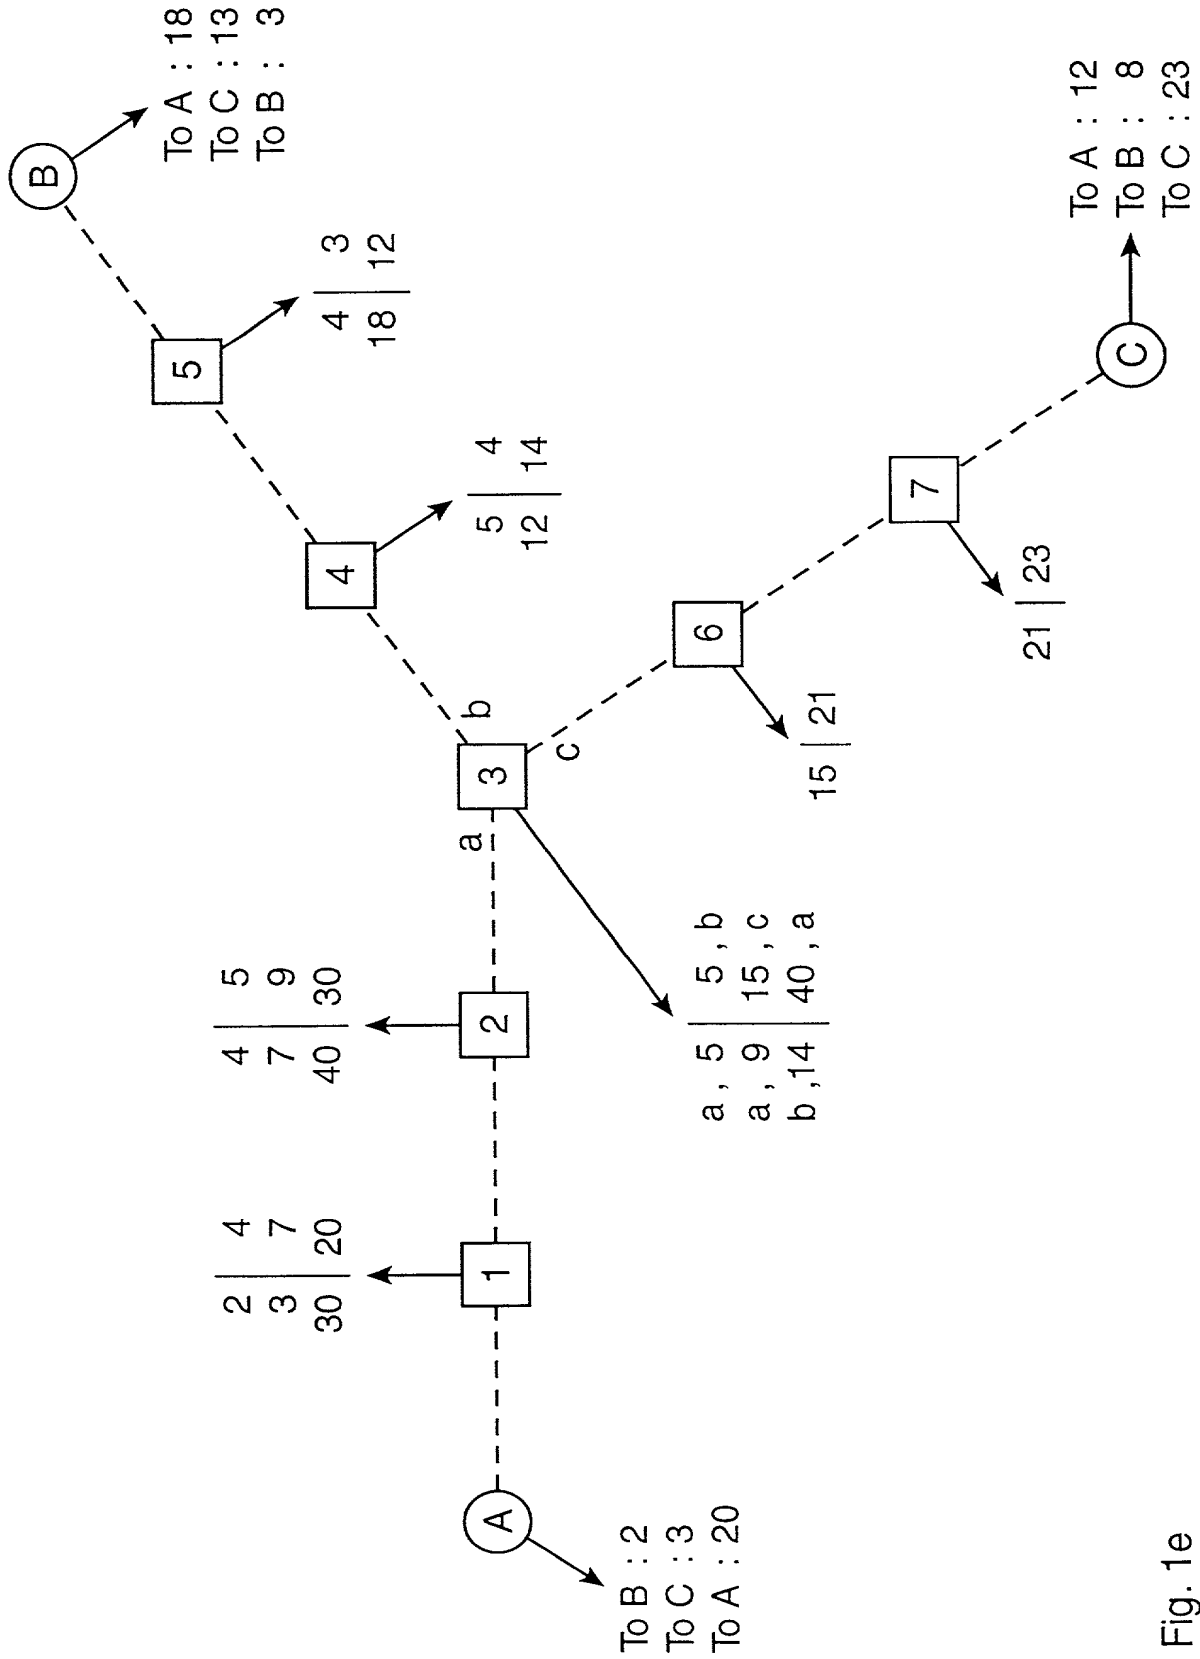


Fig. 1e

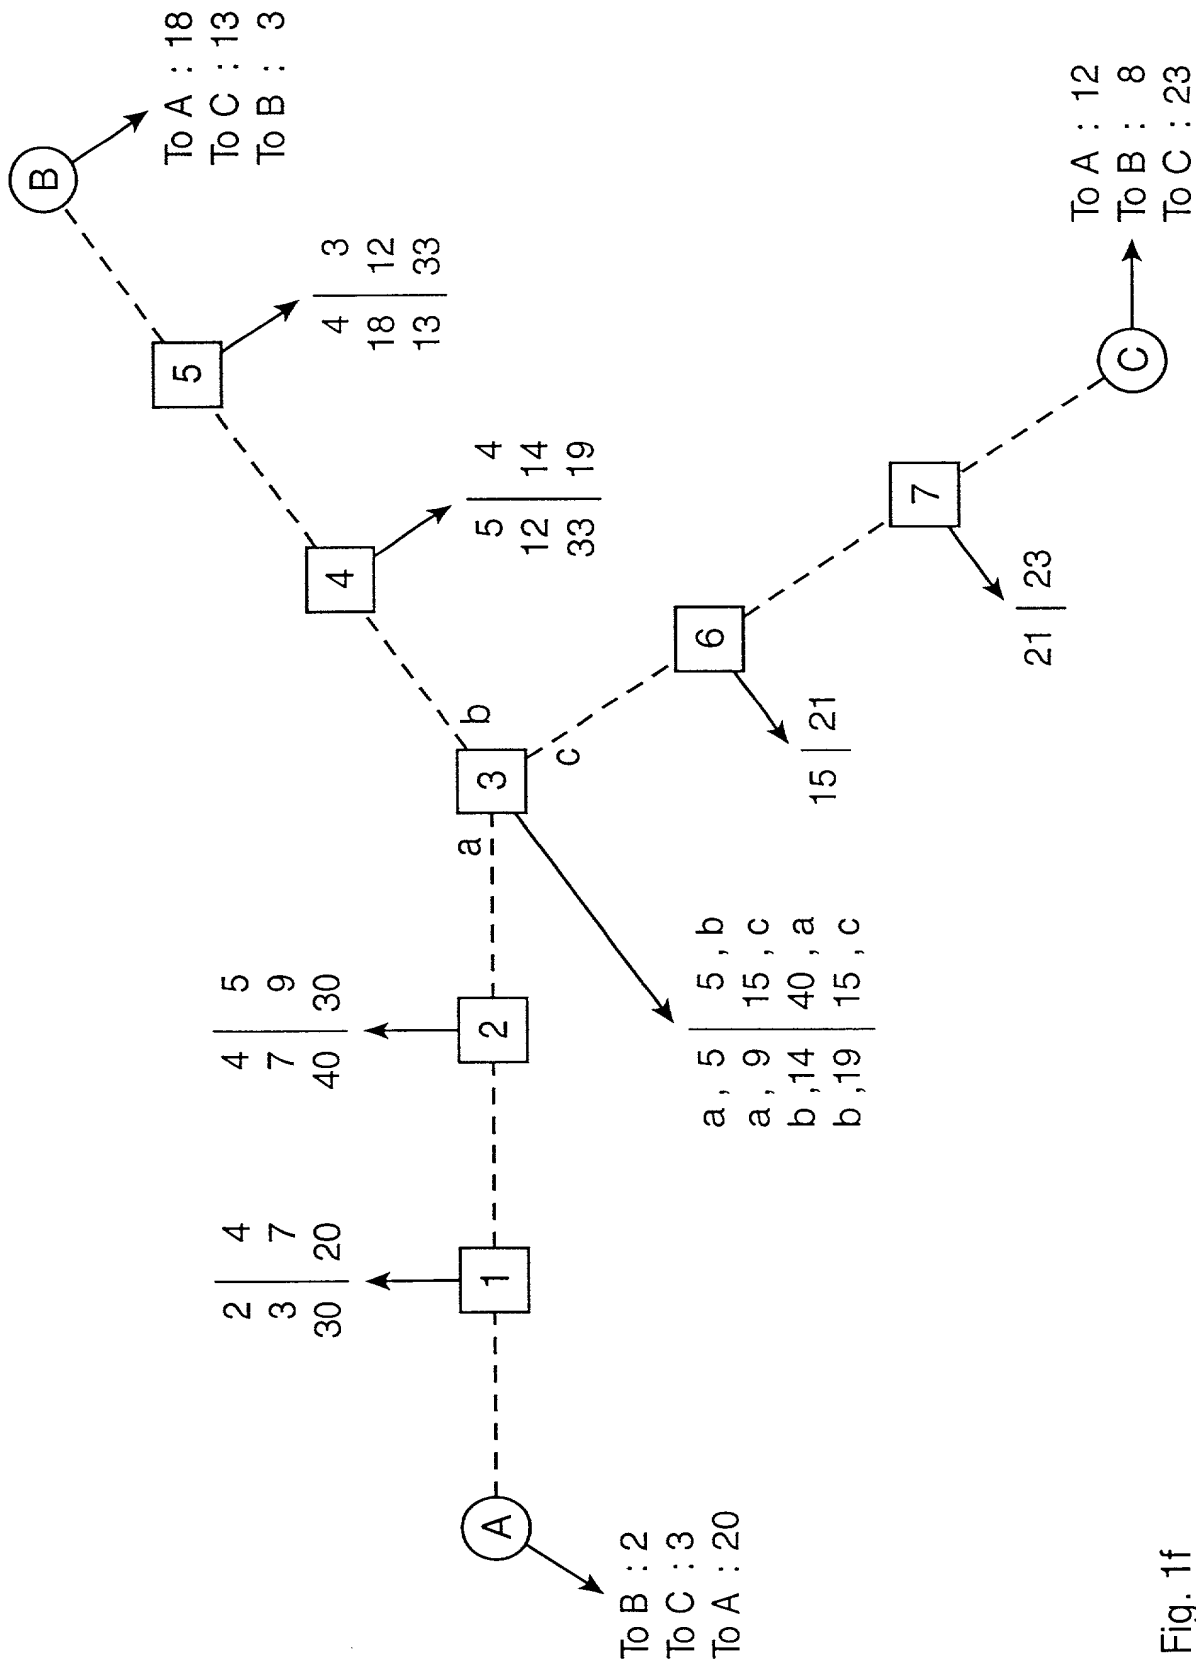


Fig. 1f

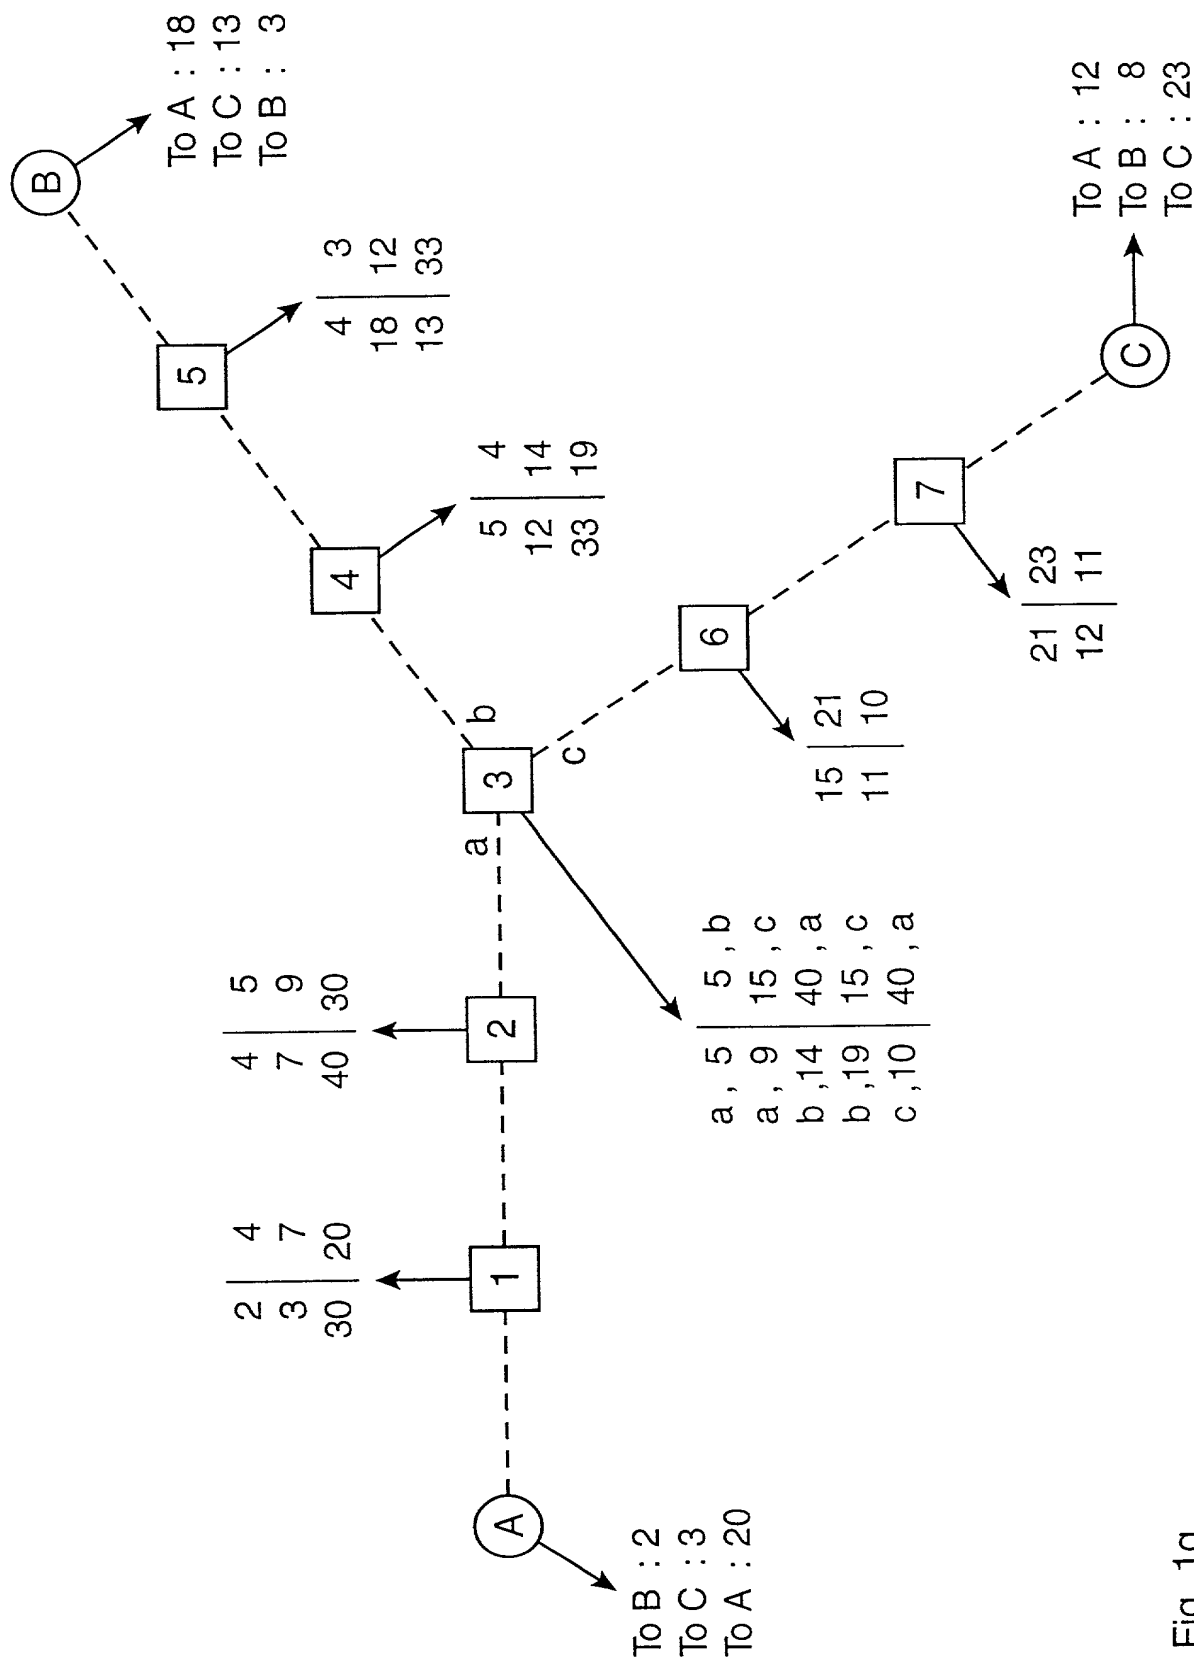


Fig. 1g

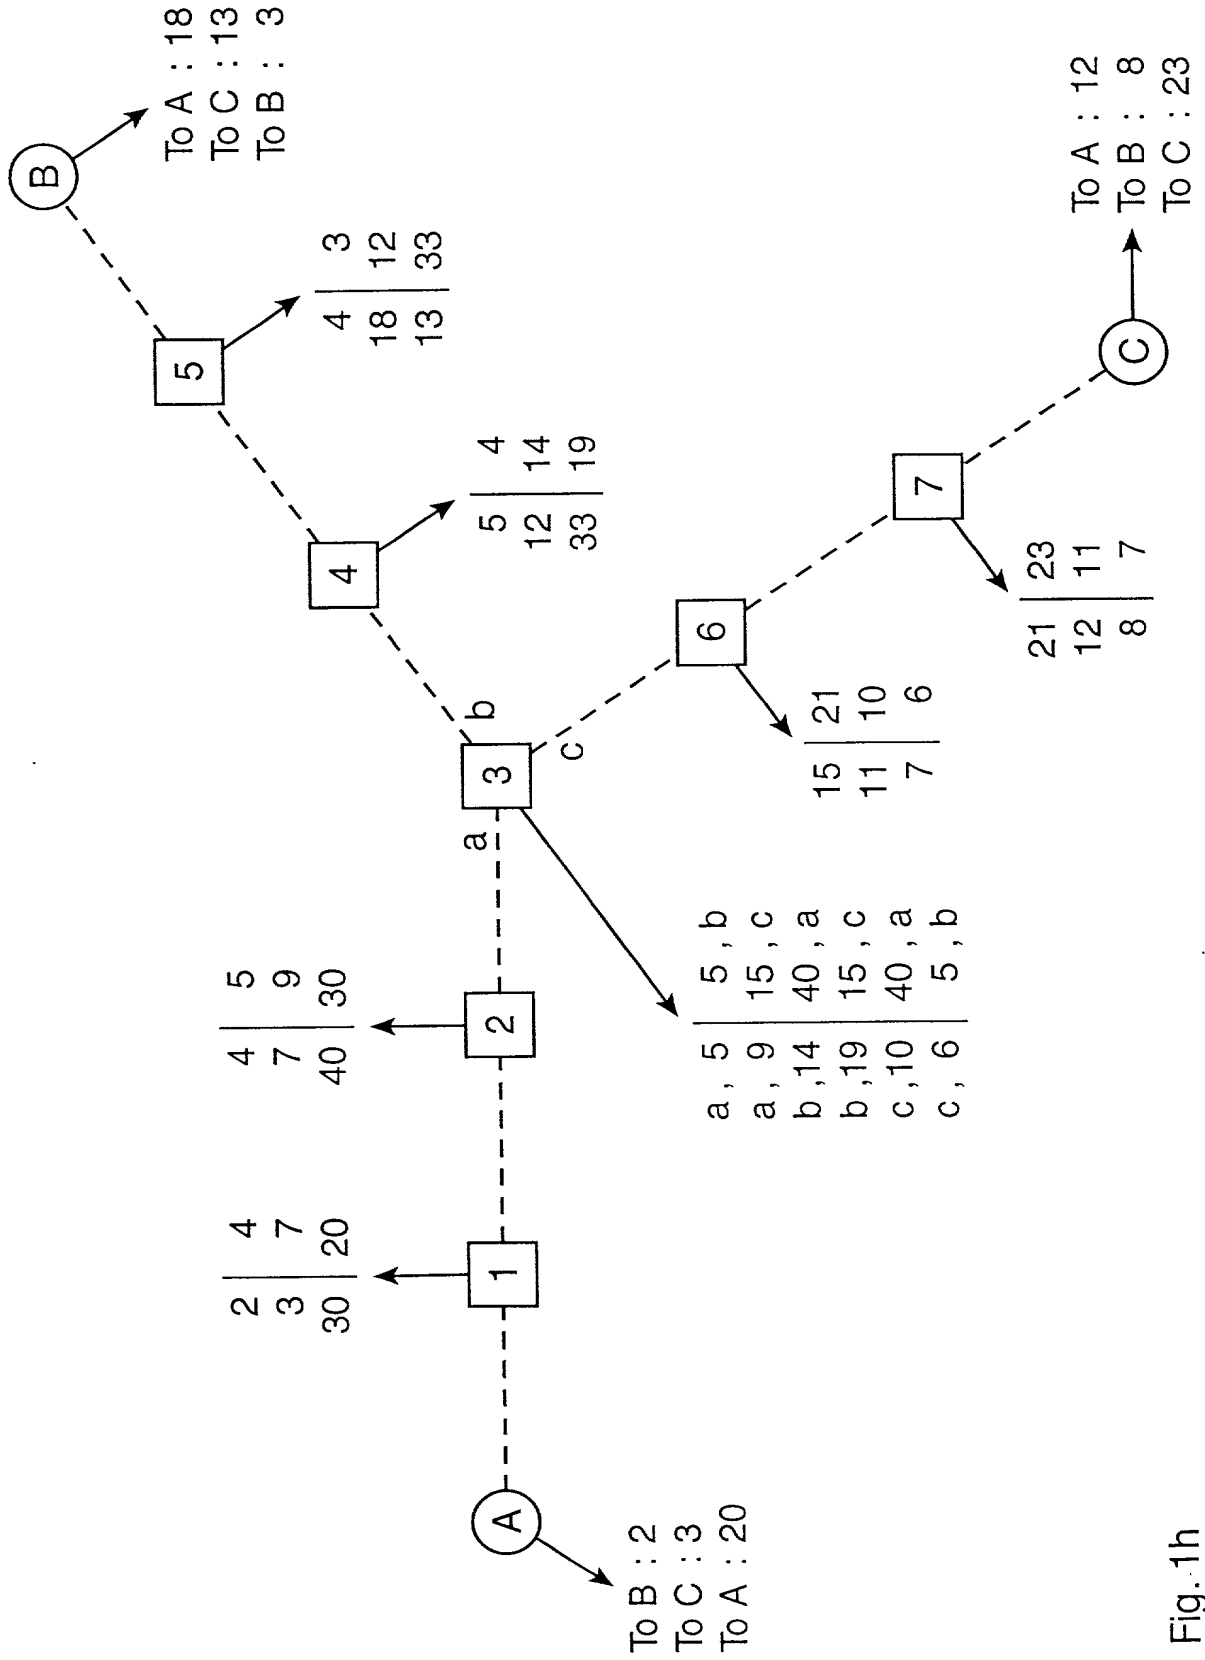


Fig. 1h

9/9

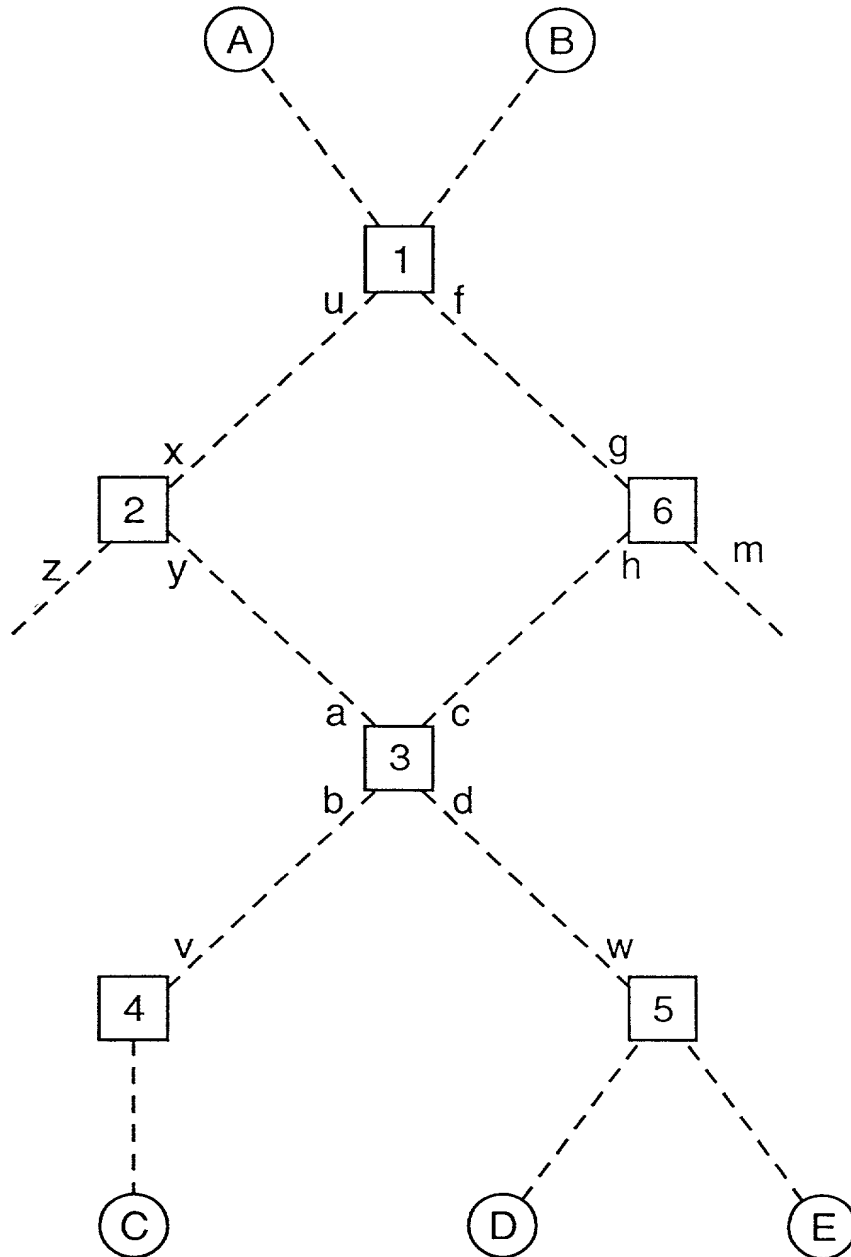


Fig. 2

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**METHOD AND APPARATUS FOR MULTIPPOINT-TO-POINT TRANSMISSION
IN AN ATM NETWORK**

the specification of which is identified by the attorney (IBM) Docket Number appearing above.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

<u>Number</u>	<u>Country</u>	<u>Day/Month/Year</u>	<u>Priority Claimed</u>
PCT/IB97/00893	EP	17/07/1997	YES

I hereby claim the benefit (a) under Title 35, United States Code, §119(e) of any U.S. application listed below and identified as a provisional application or (b) under Title 35, United States Code, §120 of any U.S. application listed below and not identified as a provisional application, and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior U.S. application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application

Prior U.S. Applications

<u>Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
-------------------	--------------------	---------------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Daniel E. McConnell, Reg. No. 20,360; Kenneth A. Seaman, Reg. No. 28,113; Joscelyn G. Cockburn, Reg. No. 27,069; Gerald R. Woods, Reg. No. 24,144; John D. Flynn, Reg. No. 35,137; Stephen J. Tytran, Reg. No. 245,846; Horace St. Julian, Reg. No. 30,329; Joseph C. Redmond, Jr., Reg. No. 18,753; John E. Hoel, Reg. No. 26,279; Christopher A. Hughes, Reg. No. 26,914; and Edward A. Pennington, Reg. No. 32,588.

Send all correspondence to: Joscelyn G. Cockburn, IBM Corporation 972/B656; PO Box 12195; Research Triangle Park, NC 27709.

1-00

First Inventor: Patrick Droz

Signature:

Patrick Droz

May 9, 2000

Date

Residence: Switzerland

Citizenship: Switzerland

Post Office Address: CH-8152 Glattbrugg, Talackerstrasse 81 CHX

2-00

Second Inventor: Ilias Iliadis

Signature:

Ilias Iliadis

May 9, 2000

Date

Residence: Switzerland

Citizenship: Switzerland

Post Office Address: CH-8803 Rüschlikon, Schloss-Strasse 29 CHX

3-00

Third Inventor: Gllad Goren

Signature:

G. Goren

10 March 2000

Date

Residence: Israel

Citizenship: Israel

Post Office Address: 44805 D.N./Ephraim Nirit 130 ILX

Attorney's Docket No.
SZ9-97-009

Declaration and Power of Attorney for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (If only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR MULTIPOINT-TO-POINT TRANSMISSION IN AN ATM NETWORK

the specification of which (check one)

☒ Is attached hereto.

☐ was filed on _____ as Application Serial No. _____

and was amended on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Priority Claimed

PCT/IB97/00893
Number

EP
Country

17/ 07/ 97
Day/Month/Year

☒ Yes ☐ No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

Prior U.S. Application(s):

Serial No. _____ Filing Date _____ Status _____

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

J.G. Cockburn 27,069; W.T. Ellis 26,874; J. D. Flynn 35,137; J.F. Galvin 25,394; J.W. Hemdon 27,901;
S.T. Keohane 34,360; S.B. Phillips 37,911; J.J. Timar 32,497; G.R. Woods 24,144;

SEND ALL CORRESPONDENCE TO: Joscelyn G. Cockburn
IBM Corporation
IPLaw Dept. 972/Bldg. 656
P.O. Box 12195
Research Triangle Park, North Carolina 27709
Phone: 919-543-9036

Attorney's Docket No.
SZ9-97-009

1-00

(1) Full Name of Inventor: Droz Patrick
Inventor's Signature: P. Droz
Residence: Talackerstrasse 81
CH-8152 Glatbrugg, Switzerland
Citizenship: Switzerland CHX
Post Office Address: same as above

Date: Jan 7th 2000

2-00

(2) Full Name of Inventor: Iliadis Ilias
Inventor's Signature: I. Iliadis
Residence: Schloss/Strasse 29
CH-8803 Rueschlikon, Switzerland
Citizenship: Greece CHX
Post Office Address: same as above

Date: Jan. 10th, 2000

3-00

(3) Full Name of Inventor: Goren Gillan
Inventor's Signature: _____
Residence: Nahalal 27
10600 D.N. Emek Izre'el, Israel
Citizenship: Israel
Post Office Address: same as above

Date: